


ÖZKAN TK Gearbox

Özkan gearboxes are suited for use on butterfly valves, which offer a quarter turn required for opening and closing fully. Designed for input torques by operator of no more than 100Nm.

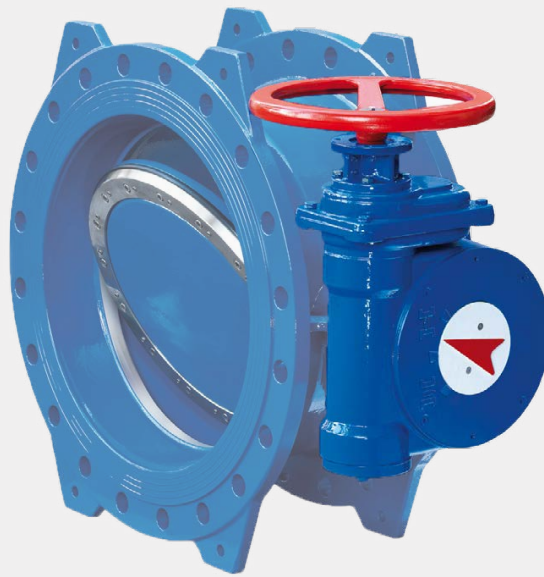

TECHNICAL GUIDE: **VH6.3**

Applications

Butterfly Valves

Product Attributes

Low input torque

Various sizes

Self-locking gear design

Approvals/Standards

According to ISO 5211

The Özkan TK series gearbox have been designed and developed by Özkan for use on their butterfly valves. They are designed to suit manual operator input or to be used with an electric actuator where the bare shaft torque is too high.

Design Specifications

- Heavy duty robust design
- Factory set 90° swing angle. Setting of the end stop by travelling nut system
- Valve interface according to ISO 5211
- Self-locking worm gearing with minimal backlash
- Mechanical position indicator
- IP 67 enclosure protection (IP 68 optional) buried service
- Clockwise and anticlockwise closing on request
- Buried service option with submerged service rating

TABLE 1 Gear Operator

Part No.	Description	Material
1	Housing	Cast iron EN-GJL-250
2	Worm wheel	Ductile cast iron EN-GJS-500-7
3	Worm shaft	Steel C 40
4	Cover	Ductile cast iron EN-GJS-400-15
5	Travelling nut	Steel 42CrMo4
6	Spur gear	Ductile cast iron EN-GJS-600-3
7	Pinion	Steel C 40
8	Bearing	-
9	'O'-ring	NBR
10	Radial seal	NBR

* Other material grades are available upon request.

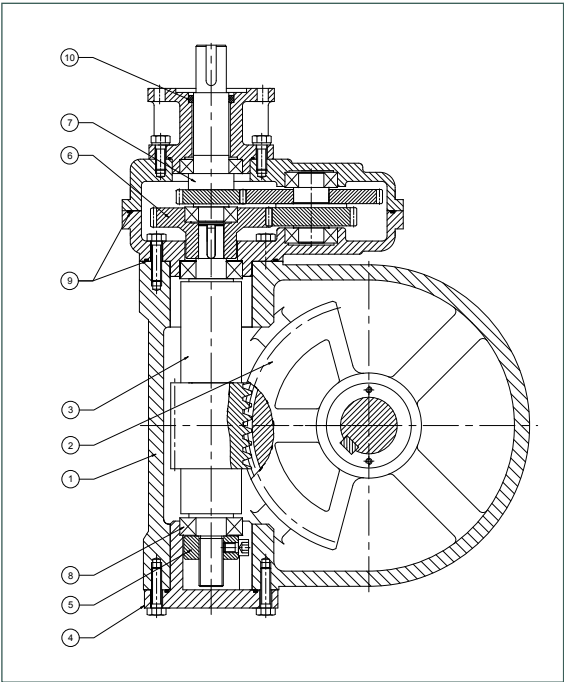


FIG. 1 Closed Position

Gear Box Positions

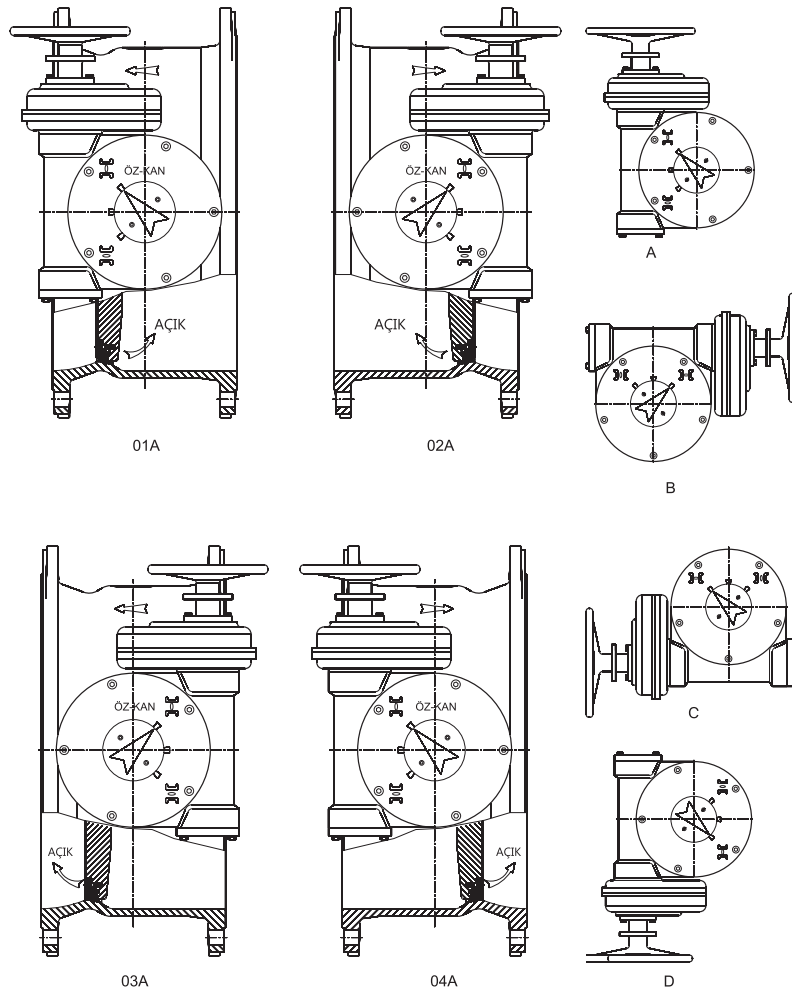


TABLE 2 Gear Box

Type		Ratio			Torque Conversion Ratio	Turns to Close	Valve Connectio ISO 5211	Weight (kg)
Worm Gearbox	Reduction Gearing	Worm Gearbox	Reduction Gearing	Total				
TK 1	-	45:1	-	45:1	9.9	11.25	F 10	14
TK 2	-	40:1	-	40:1	9.6	10	F 12	29
TK 3	-	50:1	-	50:1	12	12.50	F 14	36
TK 3	RD 4	50:1	2.90:1	145:1	31.5	36.25	F 14	53
TK 4	RD 4	60:1	2.90:1	174:1	45	43.50	F 16	81
TK 5	RD 5	60:1	6.94:1	416:1	119.5	104	F 25	133
TK 6	RD 6	65:1	11.84:1	770:1	220	192.50	F 30	191
TK 7	RD 7	60:1	24.17:1	1450:1	418	362.50	F 35	436
TK 8	RD 8	93:1	24.17:1	2248:1	648	562	F 40	720
TK 8	RD 85	93:1	67.68:1	6294:1	1806	1574	F 40	750
TK 10	RD 15	89:1	60.45:1	5380:1	1615	1345	F 48	1610



Scan for more
information

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hygrade Water product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hygrade Water unless expressly stated in any sale and purchase agreement entered into between Hygrade Water and the user.

18 December 2019

0800 494 723
hygradewater.co.nz

102 Neilson Street
Onehunga, Auckland 1061, New Zealand
PO Box 58 142, Botany, Auckland 2163

