

Accio 500 & 600 mm Manhole Cover and Frame

The Accio 500 and 600 mm Ductile Iron Manhole Access Covers provide local authorities with a secure and sealed quality cover in AS 3996:2019 Class B and Class D.



TECHNICAL GUIDE: **CG1.1**

Applications

Where gas, air and water tightness are a concern, the Accio DI multipurpose cover and frame meets all needs

Available in DN500 or DN600 clear opening models

Product Attributes

Lightweight

Made from ductile iron grade 500/7

Up to 40% lighter than cast iron

Bolted down and sealed

Protects against theft & unwanted entry

Approvals/Standards

Complies with AS3996:2019 Class B & D

Quality

ISO 9001:2008 Quality Management

The bolt down Accio Ductile Iron 500 and 600 covers allows sealed, secure, and safe access to your manholes. The Class B and D loading of these covers will satisfy most applications.

Installation

Flat based frame makes for easy installation on chamber lid. Frame flange is slotted to allow for anchoring.

Testing



Tested in accordance with AS 3996:2019 to class D240 (24 tonne). Meets the requirements of HN-HO-72. Also available in class B.

Durability

Manufactured from Ductile Iron (Grade 500-7) in accordance with ISO 1083.



Hygrade code	Description
DIMHSTCF500	500mm Class D Multipurpose
DIMHSTSTCFB	600mm Class B Stormwater
DIMHSTSCFD	600mm Class D Sewer
DIMHSTSTCFD	600mm Class D Stormwater

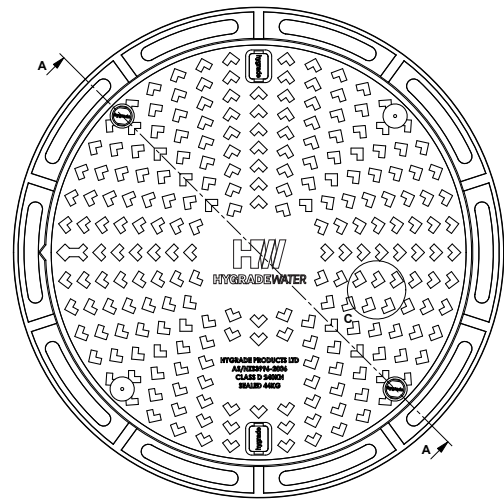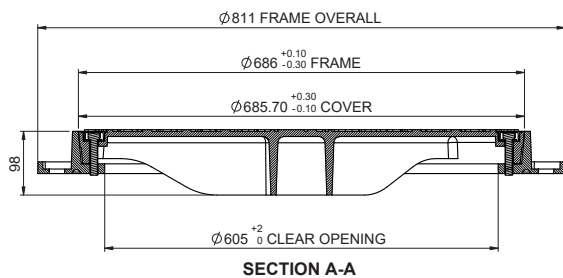

Scan for more information

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hygrade Water product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hygrade Water unless expressly stated in any sale and purchase agreement entered into between Hygrade Water and the user.

November 2019